



	<p><b>Ws-508TV LCD</b></p> <p>: 24± 5% VDC : 0-45°C/90%RH : 8,5"; 256 : : IP65 / : , PC[RS-232], PLC[RS-485], PLC[RS-232] : : IP65 : .21 : : S35(DIN) : .26 .4</p>
	<p><b>Ws-32MC</b></p> <p>: 100~240 VAC : 24 VDC ( ) : 12 x AC/DC ( I ) =2A U =250V : 20 x 24 VDC 120 Khz ( 0/24V ) : : 1 x Rs232 ( ) : TS35(DIN) : .22 .4</p>
	<p><b>Ws-8EY</b></p> <p>: 24 VDC ( Ws-32MC) : 8 x AC/DC ( I ) =2A U =250V : : 1 x Rs232 ( ) : TS35(DIN) : .22 .5</p>
	<p><b>Ws-RTD6</b></p> <p>: 24 VDC ( Ws-32MC) : 6 x Pt100 (-200~850°C; 0,1°C; ~1%) : : 1 x Rs232 ( ) : TS35(DIN) : .22 .5</p>
	<p><b>Ws-4A2D</b></p> <p>: 24 VDC ( Ws-32MC) : 4 x 0~10V 4~20mA : 2 x 0~10V 4~20mA : : 1 x Rs232 ( ) : TS35(DIN) : .22 .5</p>
	<p><b>Ws-CBE</b></p> <p>: : PIN Ws-32MC : : 1 x "Ethernet"</p>
	<p><b>Ws-SPD24301</b></p> <p>: 100-240VAC 47-63Hz 800mA : 24VDC 1.25A : : TS35(DIN) : .22 .7</p>
	<p><b>Ws-232PO-9M-400</b></p> <p>/ Rs232- 9pin D-sub connector : : 150, 180, 400</p>
	<p><b>Ws-CD1</b></p> <p>- - -</p>




Rys.1

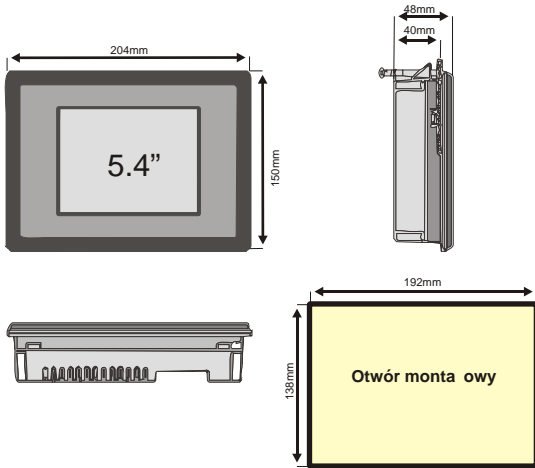


**WS-506TV**

Rys.2


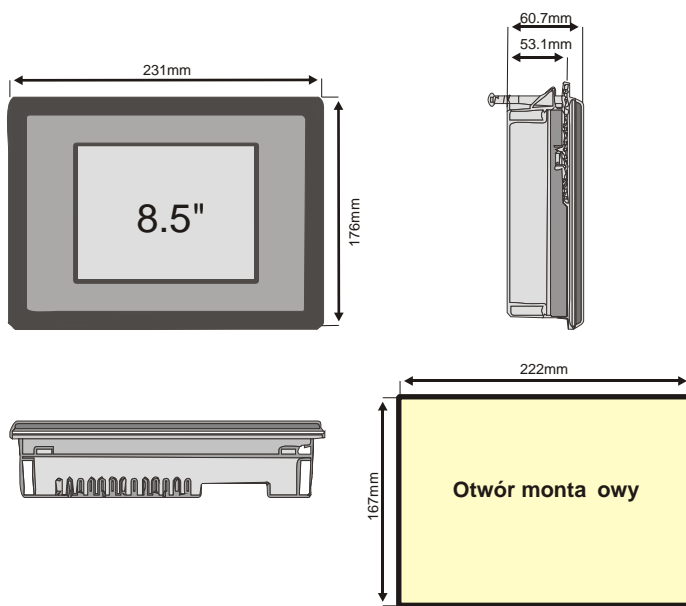


**WS-508TV**


Rys.3

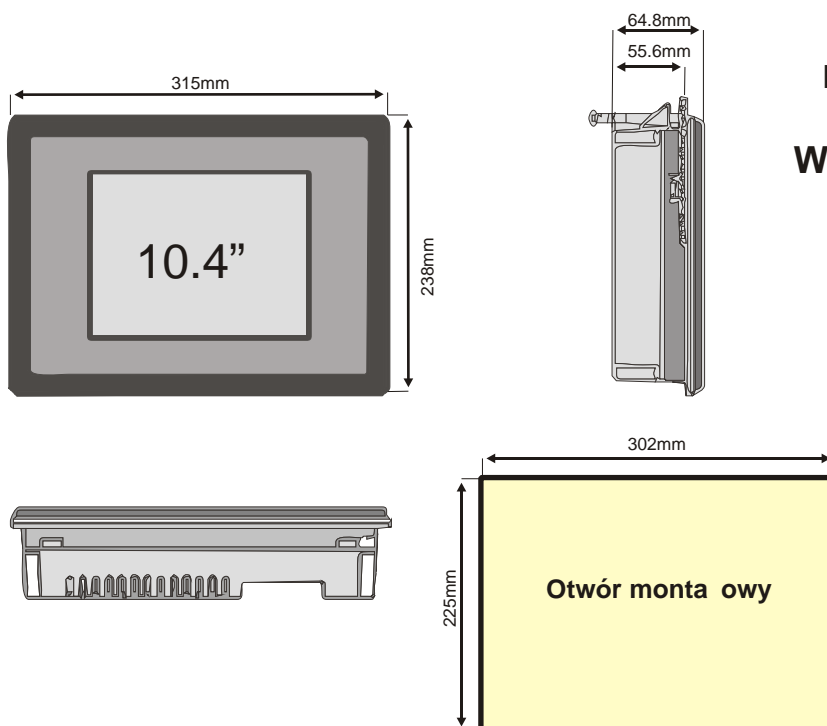


**WS-510TV**

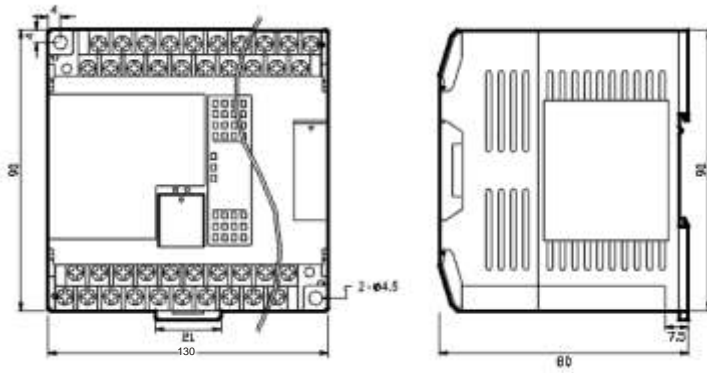


Rys.4

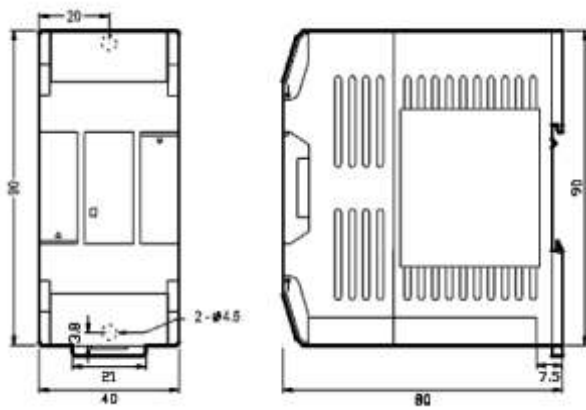

Rys.5

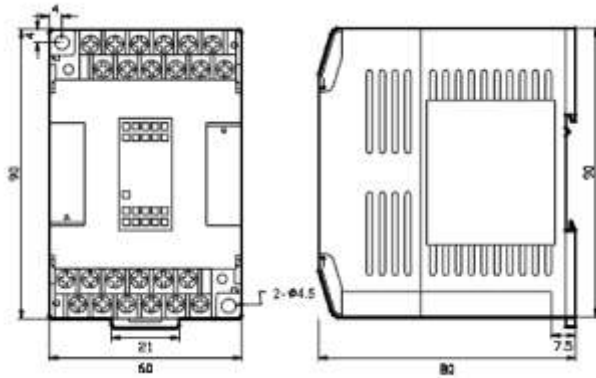

Rys.6

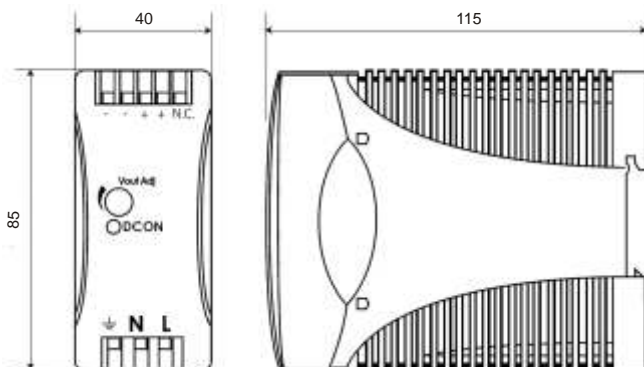

Rys.7