


WS2007 KS

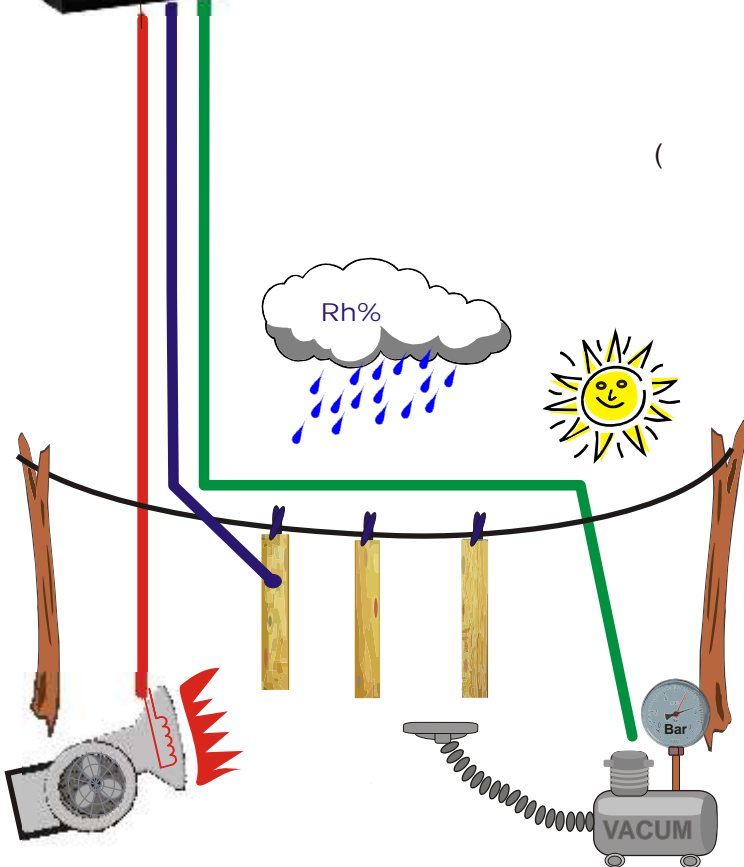

WS 2007 KS

• (),
 •),
 • ,
 • ,
 • 20
 • 20
 • (,
 •),
 • 10
 • (, .)
 • ,
 • ,

():

• 10

•

•

•

•

•


•

•


•

•


(. NO; NC)



	<p>Ws-508TV LCD</p> <p>: 24± 5% VDC : 0-45°C/90%RH : 8,5"; 256 : IP65 / : , PC[RS-232], PLC[RS-485], PLC[RS-232] : IP65 : .21 : TS35(DIN) : .26 .4</p>
	<p>Ws-32MC /</p> <p>: 100~240 VAC : 24 VDC () : 12 x AC/DC (I =2A U =250V) : 20 x 24 VDC 120 Khz (0/24V) : 1 x RS232 () : TS35(DIN) : .22 .4</p>
	<p>Ws-8EY</p> <p>: 24 VDC (Ws-32MC) : 8 x AC/DC (I =2A U =250V) : 1 x RS232 () : TS35(DIN) : .22 .5</p>
	<p>Ws-RTD6</p> <p>: 24 VDC (Ws-32MC) : 6 x Pt100 (-200~850°C; 0,1°C; ~1%) : 1 x RS232 () : TS35(DIN) : .22 .5</p>
	<p>Ws-4A2D -</p> <p>: 24 VDC (Ws-32MC) : 4 x 0~10V 4~20mA : 2 x 0~10V 4~20mA : 1 x RS232 () : TS35(DIN) : .22 .5</p>
	<p>Ws-CBE</p> <p>- PIN Ws-32MC : 1 x "Ethernet"</p>
	<p>Ws-SPD24301</p> <p>: 100-240VAC 47-63Hz 800mA : 24VDC 1.25A : TS35(DIN) : .22 .7</p>
	<p>Ws-232PO-9M-400 /</p> <p>Rs232- 9pin D-sub connector : 150, 180, 400</p>
	<p>Ws-CD1</p> <p>- - -</p>




Rys.1

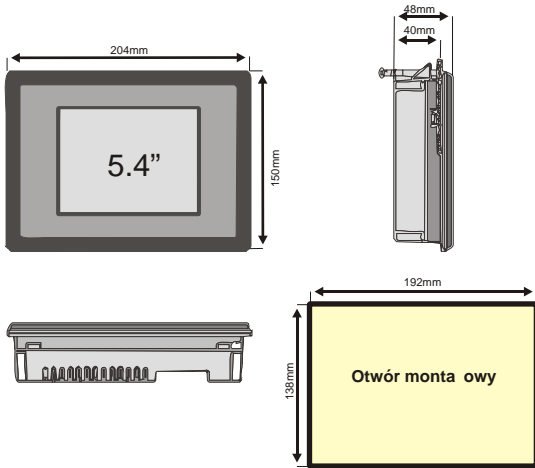


WS-506TV

Rys.2


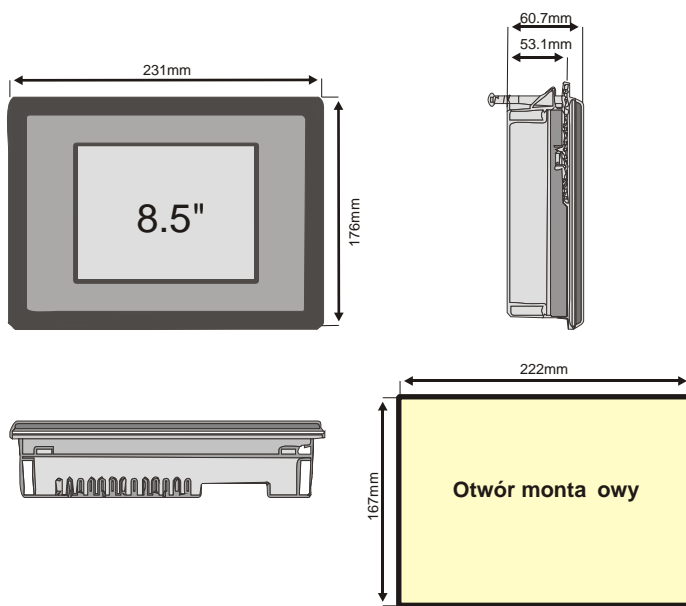


WS-508TV


Rys.3

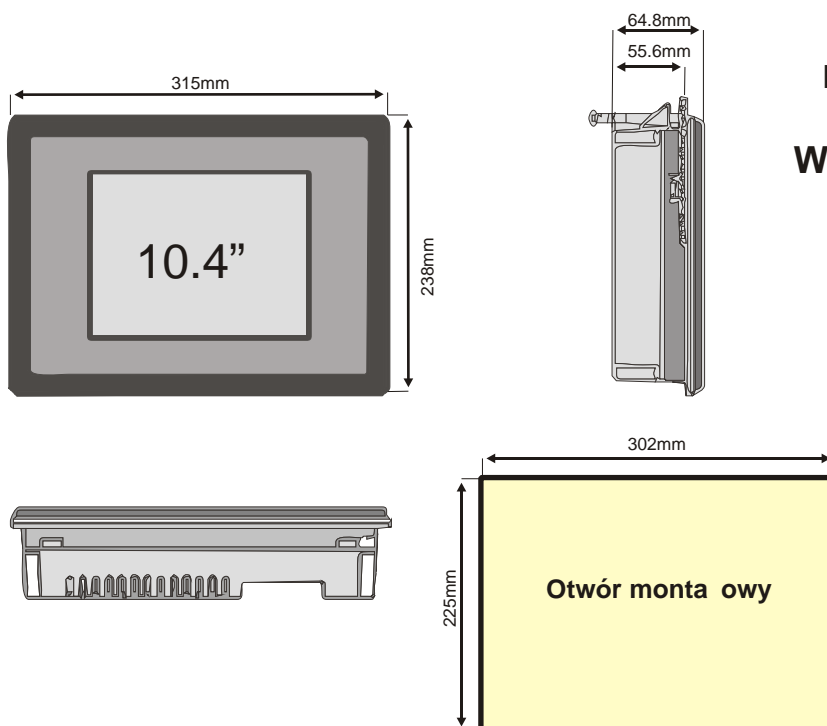


WS-510TV

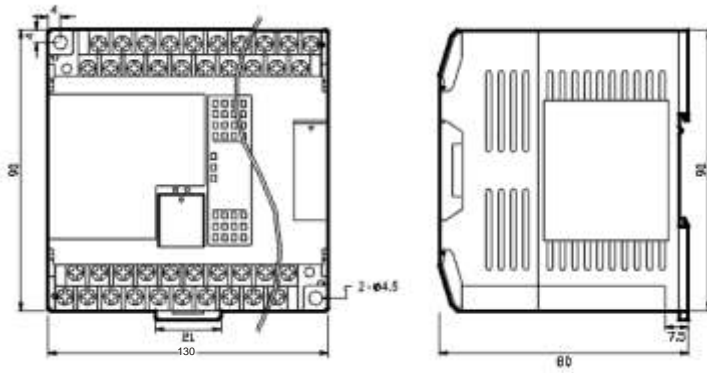


Rys.4

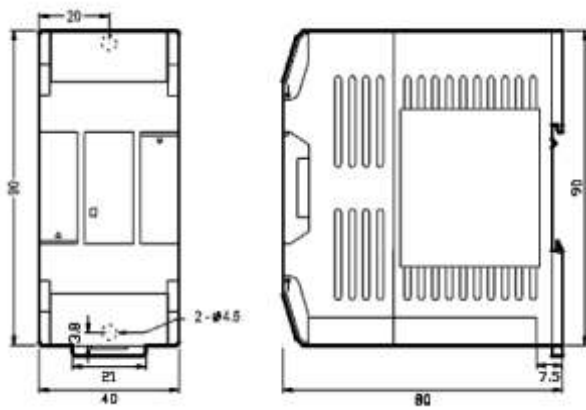

Rys.5

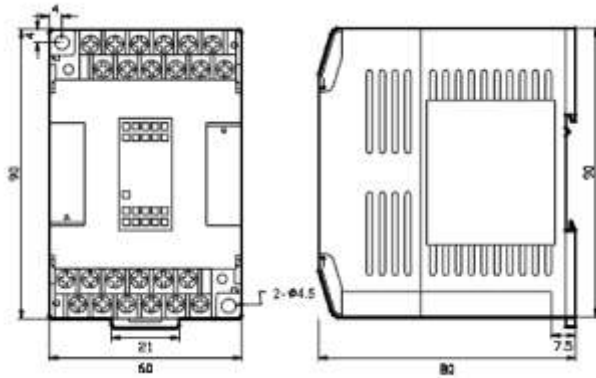

Rys.6

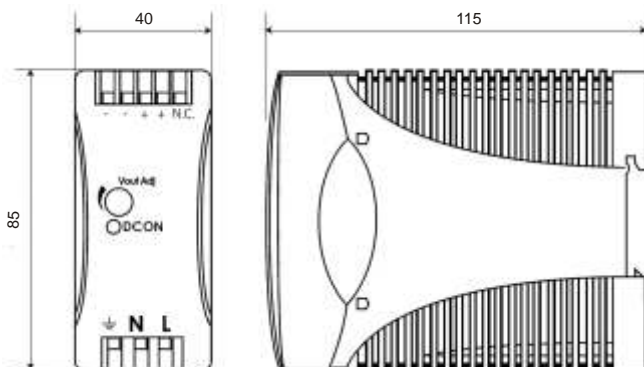

Rys.7