



	<p><b>Ws-508TV/Ws-510TV</b> <span style="float: right;"><b>LCD</b></span></p> <p>: 24± 5% VDC : 0-45°C/90%RH : 8,5"/10,4" ; 256 : IP65 / : , PC[RS-232], PLC[RS-485], PLC[RS-232] : IP65 : .21 .2 : TS35(DIN) : .26 .4</p>
	<p><b>Ws-32MC</b> /</p> <p>: 100~240 VAC : 24 VDC ( ) : 12 x AC/DC ( I ) =2A U =250V : 20 x 24 VDC 120 Khz ( 0/24V ) : 1 x RS232 ( ) : TS35(DIN) : .22 .4</p>
	<p><b>Ws-16EY</b></p> <p>: 24 VDC ( Ws-32MC) : 16 x AC/DC ( I ) =2A U =250V : 1 x RS232 ( ) : TS35(DIN) : .22 .5</p>
	<p><b>Ws-RTD6</b></p> <p>: 24 VDC ( Ws-32MC) : 6 x Pt100 (-200~850°C; 0,1°C; ~1% : 1 x RS232 ( ) : TS35(DIN) : .22 .5</p>
	<p><b>Ws-TC2</b> -</p> <p>: 24 VDC ( Ws-32MC) : 2 x J(-200~1200°C) K(-190~1300°C) R(0~1800°C) S(0~1700°C) E(-190~1000°C) T(-190~380°C) B(350~1800°C) N(-200~1000°C) : 1 x RS232 ( ) : TS35(DIN) : .22 .5</p>
	<p><b>Ws-CBE</b> -</p> <p>: PIN Ws-32MC : 1 x "Ethernet"</p>
	<p><b>Ws-SPD24301</b></p> <p>: 100-240VAC 47-63Hz 800mA : 24VDC 1.25A : TS35(DIN) : .22 .7</p>
	<p><b>Ws-232PO-9M-400</b> /</p> <p>Rs232- 9pin D-sub connector : 150, 180, 400</p>
	<p><b>Ws-CD1</b></p> <p>- - -</p>




Rys.1

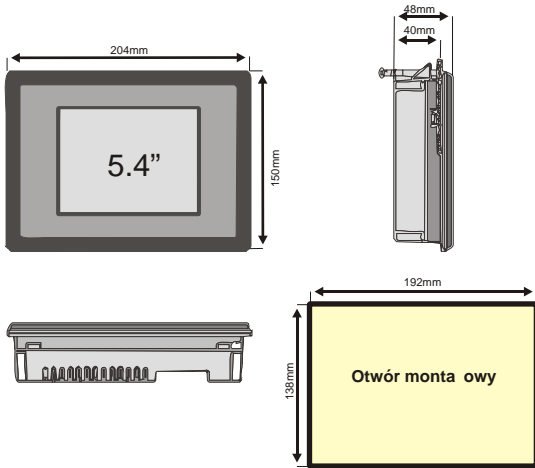


**WS-506TV**

Rys.2


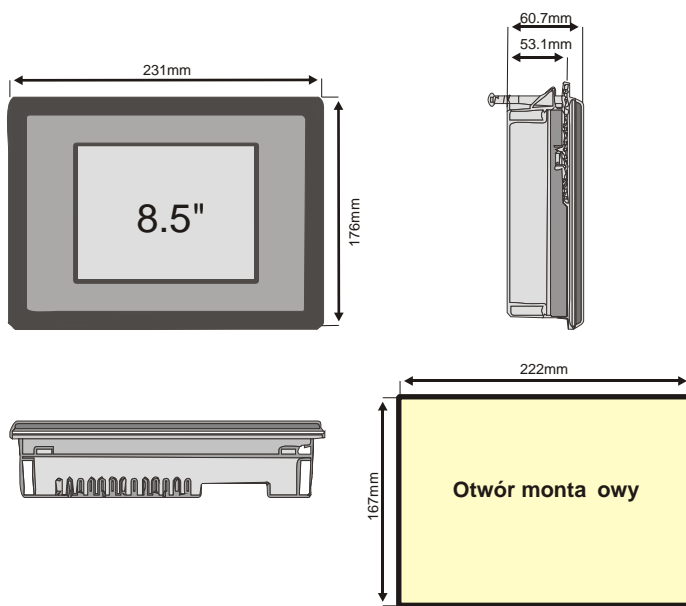


**WS-508TV**


Rys.3

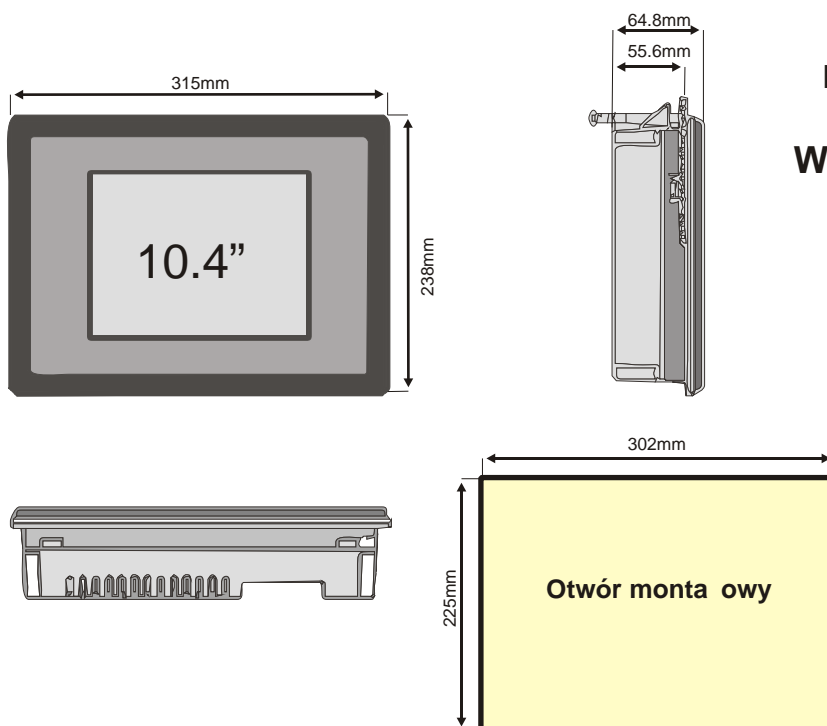


**WS-510TV**

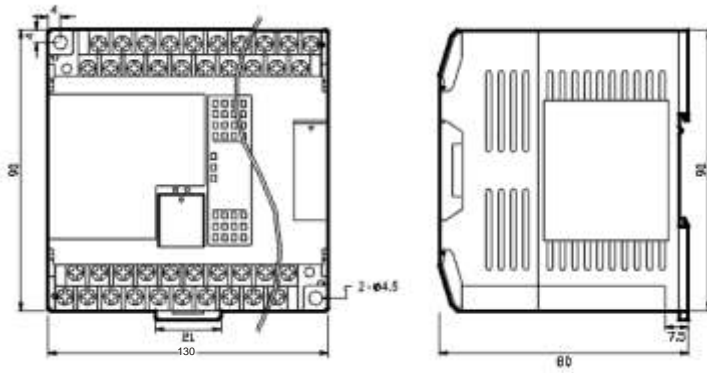


Rys.4

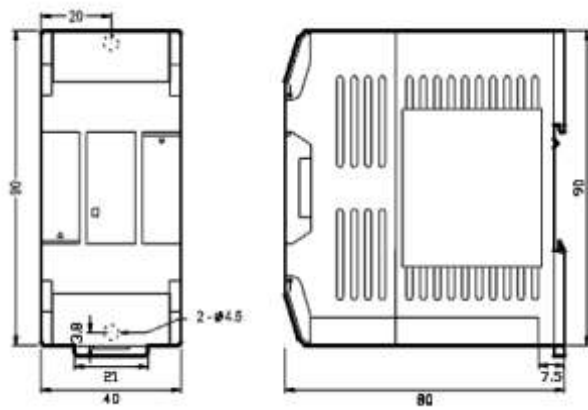

Rys.5

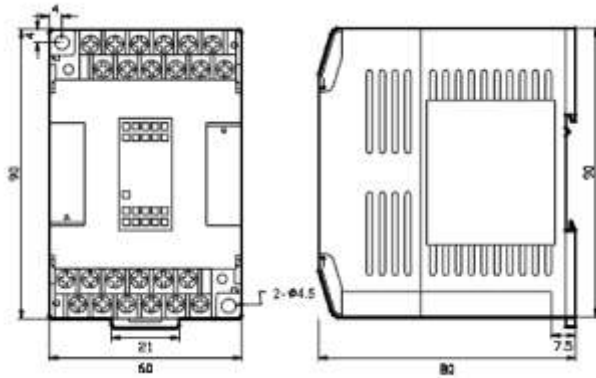

Rys.6

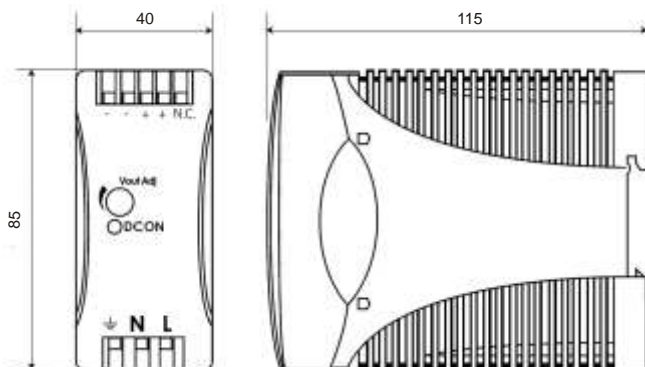

Rys.7