
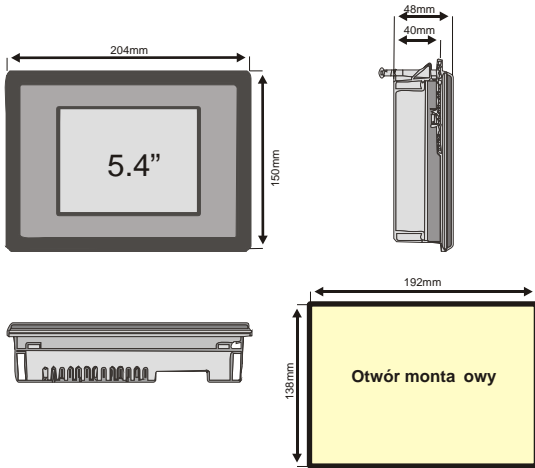



/

	<p>Ws-506TV/Ws-508TV LCD</p> <p>: 24± 5% VDC : 0-45°C/90%RH : 5,4"/8,5"; 256 : IP65 / : , PC[RS-232], PLC[RS-485], PLC[RS-232] : IP65 : .21 : TS35(DIN) : .26 .4</p>
	<p>Ws-32MC /</p> <p>: 100-240 VAC : 24 VDC () : 12 x AC/DC (I) =2A U =250V : 20 x 24 VDC 120 Khz () 0/24V) : 1x RS232 () : TS35(DIN) : .22 .4</p>
	<p>Ws-8EY</p> <p>: 24 VDC (Ws-32MC) : 8 x AC/DC (I) =2A U =250V : 1x RS232 () : TS35(DIN) : .22 .5</p>
	<p>Ws-4A2D -</p> <p>: 24 VDC (Ws-32MC) : 4 x 0~10V 4~20mA : 2 x 0~10V 4~20mA : 1x RS232 () : TS35(DIN) : .22 .5</p>
	<p>Ws-CBE -</p> <p>: PIN Ws-32MC : 1 x "Ethernet"</p>
	<p>Ws-SPD24301</p> <p>: 100-240VAC 47-63Hz 800mA : 24VDC 1.25A : TS35(DIN) : .22 .7</p>
	<p>Ws-232PO-9M-400 /</p> <p>Rs232- 9pin D-sub connector : 150, 180, 400</p>
	<p>Ws-CD1</p> <p>- - -</p>




Rys.1

WS-506TV

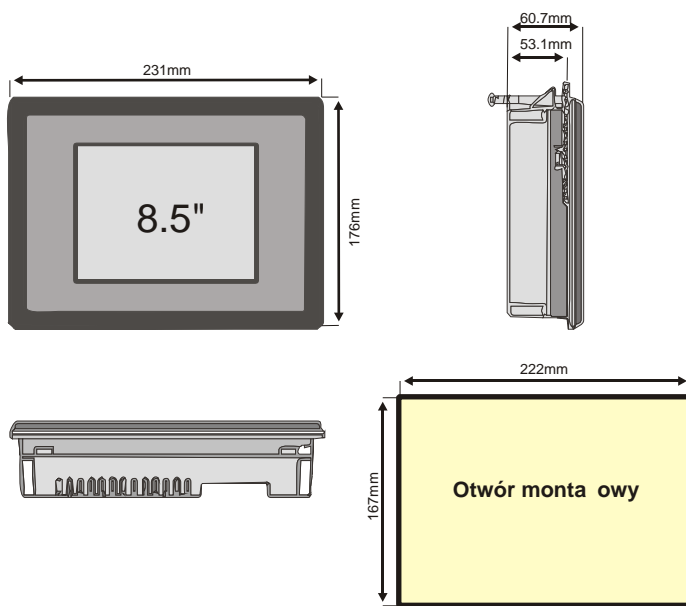



Rys.2

WS-508TV

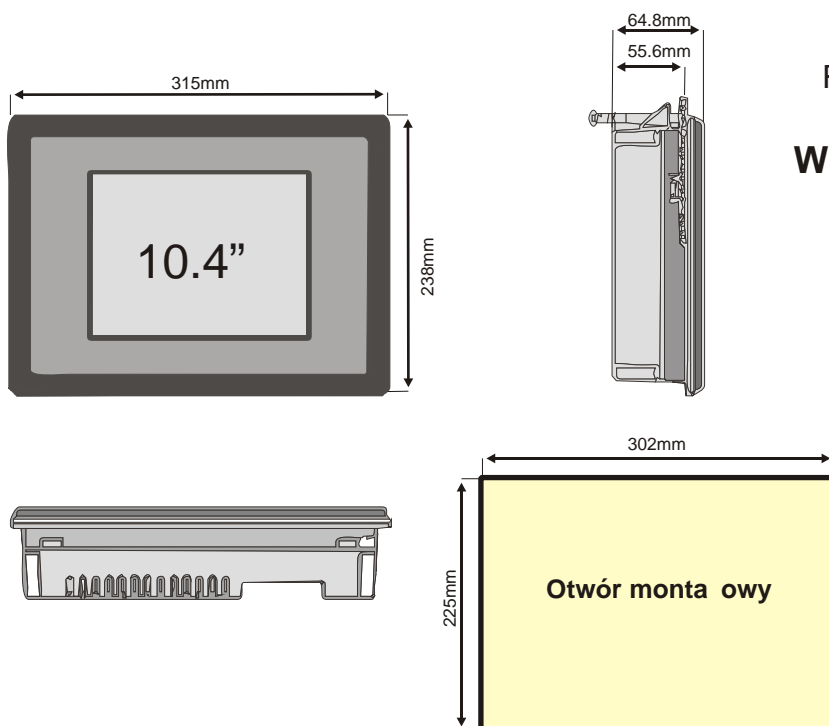


Rys.3


WS-510TV

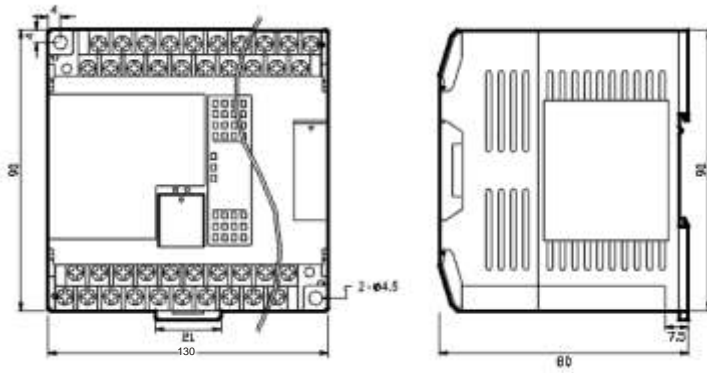


Rys.4

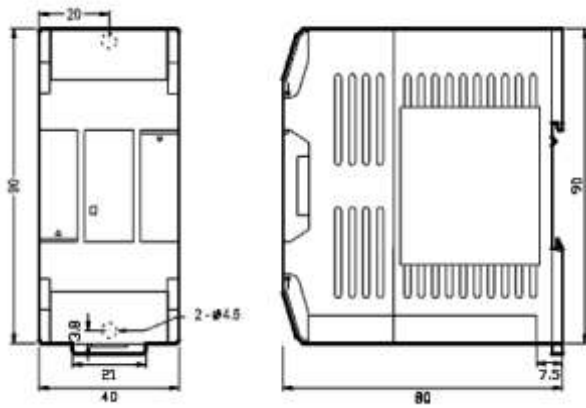

Rys.5

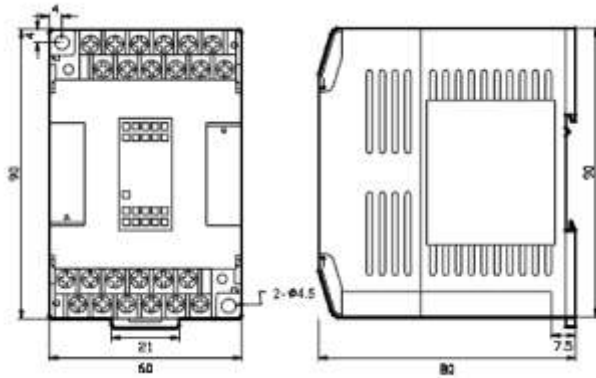

Rys.6

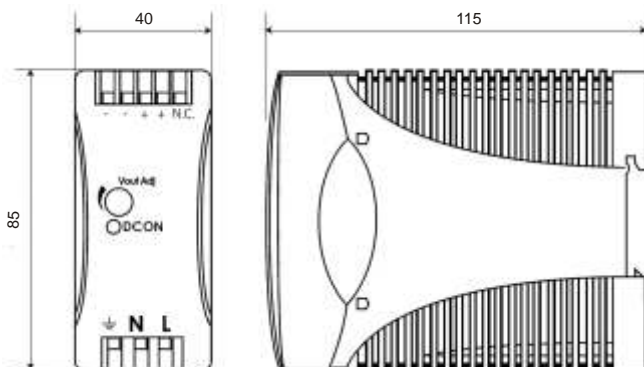

Rys.7